



MCL HANGER

CONCENTRIC Open Web Steel Joist Hanger

Material Code -


CSI Number 055600

M3 Hanger Cut Sheet


Sintered High Temp Metal

- For new construction, building upgrades, floor plan changes and maintenance.
- Use on bottom chord of open web steel joist where chord gap is between .85"-1.0875".
- Provides two-way locking on the chord.
- Use to hang items from Unistrut or to affix Unistrut to an open web steel joist.
- Low narrow profile allows installation within 6" of panel points.
- Quick and easy to pre assemble and install.
- Use any length all thread rod in 1/4", 3/8", or 1/2" diameter.
- Need heavy duty washer (2.5" diameter x 1.28" thick), all thread rod, and hex nuts for installation. Can be purchased separately through MCL Hangers.
- All parts manufactured in the United States.


Bottom chord, end view



Unistrut, end view



MCL Hangers for 3/8" and 1/2" meets standards for safety under UL203, ULC/ORD C203 and NFPA-13 Pipe Hanger Equipment for Fire Protection Service.

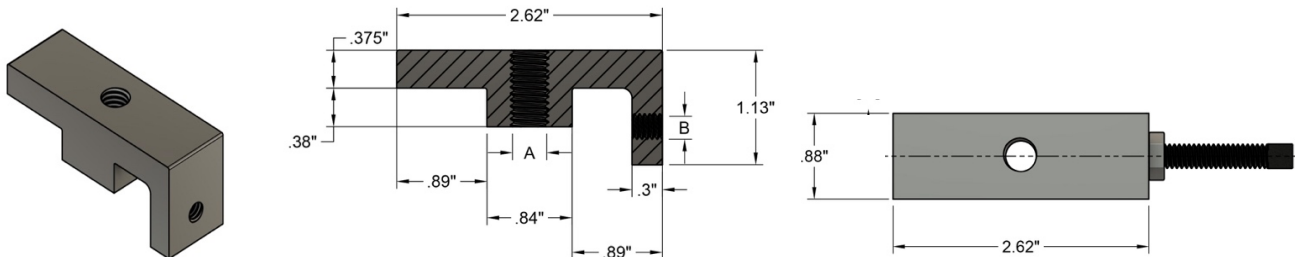

Part Number	A Thread Size	Max. Pipe Size	UL Test Load (lbs.)
MM325T	1/4"	-	-
MM338T	3/8"	4"	1500
MM350T	1/2"	8"	4050





MCL HANGER

CONCENTRIC Open Web Steel Joist Hanger

M3 Hanger Cut Sheet

Material Code -
CSI Number 055600
Sintered High Temp Metal

MCL HANGERS (M1, M2, M3) - FC-0208-50 MATERIAL SPECIFICATIONS

Iron-Copper and Copper Steel

PPM Material Properties – Inch-Pound Units

MINIMUM VALUES		TYPICAL VALUES												
Material Designation Code	Minimum Strength (A)	TENSILE PROPERTIES			ELASTIC CONSTANTS					HARDNESS				
	Yield	Ultimate Strength	Yield Strength (0.2%)	Elongation (in 1 inch)	Young's Modulus	Poisson's Ratio	Unnotched Charpy Impact Energy	Transverse Rupture Strength	Compressive Yield Strength (0.1%)	Macro-indentation (apparent)	Micro-indentation (converted)	RBF Fatigue Limit 90% Survival	Density	
	10 ³ psi	10 ³ psi	10 ³ psi	%	10 ⁶ psi		ft-lbf	10 ³ psi	10 ³ psi	Rockwell		10 ³ psi	g/cm ³	
-50	50	60	55	<1	17.5	0.25	5	125	50	73	N/D	23	6.7	

INSTALLATION INSTRUCTIONS

You will need: 1 – M3 MCL Hanger (includes 1 set screw and 1 jam nut), 1 – all-thread rod, 1 – heavy duty washer, & 2 – hex nuts

1. Take set screw (1/4" x 1') and thread 1/4" jam net all the way to the head of the screw.
2. Thread set screw into the leg of the M3 Hanger.
3. Take all-thread rod and thread up through the hanger enough to secure a hex nut onto it on top of the hanger.
4. Where you want to put the hanger, hold all-thread rod and push hanger up through the center gap of the top or bottom chord until the hanger goes completely through. Rotate 90° and drop hanger back down on the chord.

Note: Unistrut – Only M1 and M3 - For Unistrut hold the hanger and drop the all-thread rod through the elongated slot, resting the hanger in the channel of the Unistrut.

5. Slide heavy duty washer onto the threaded rod and hold while threading a hex nut onto the rod. Finger-tighten against washer.
6. Torque set screw and nuts: 60 lb. inch or 6-8 NW. If torque wrench is not available, use a wrench tighten hex nut 1/2 to 1 full turn.

